



Insulation Inspection



Source: NAIMA

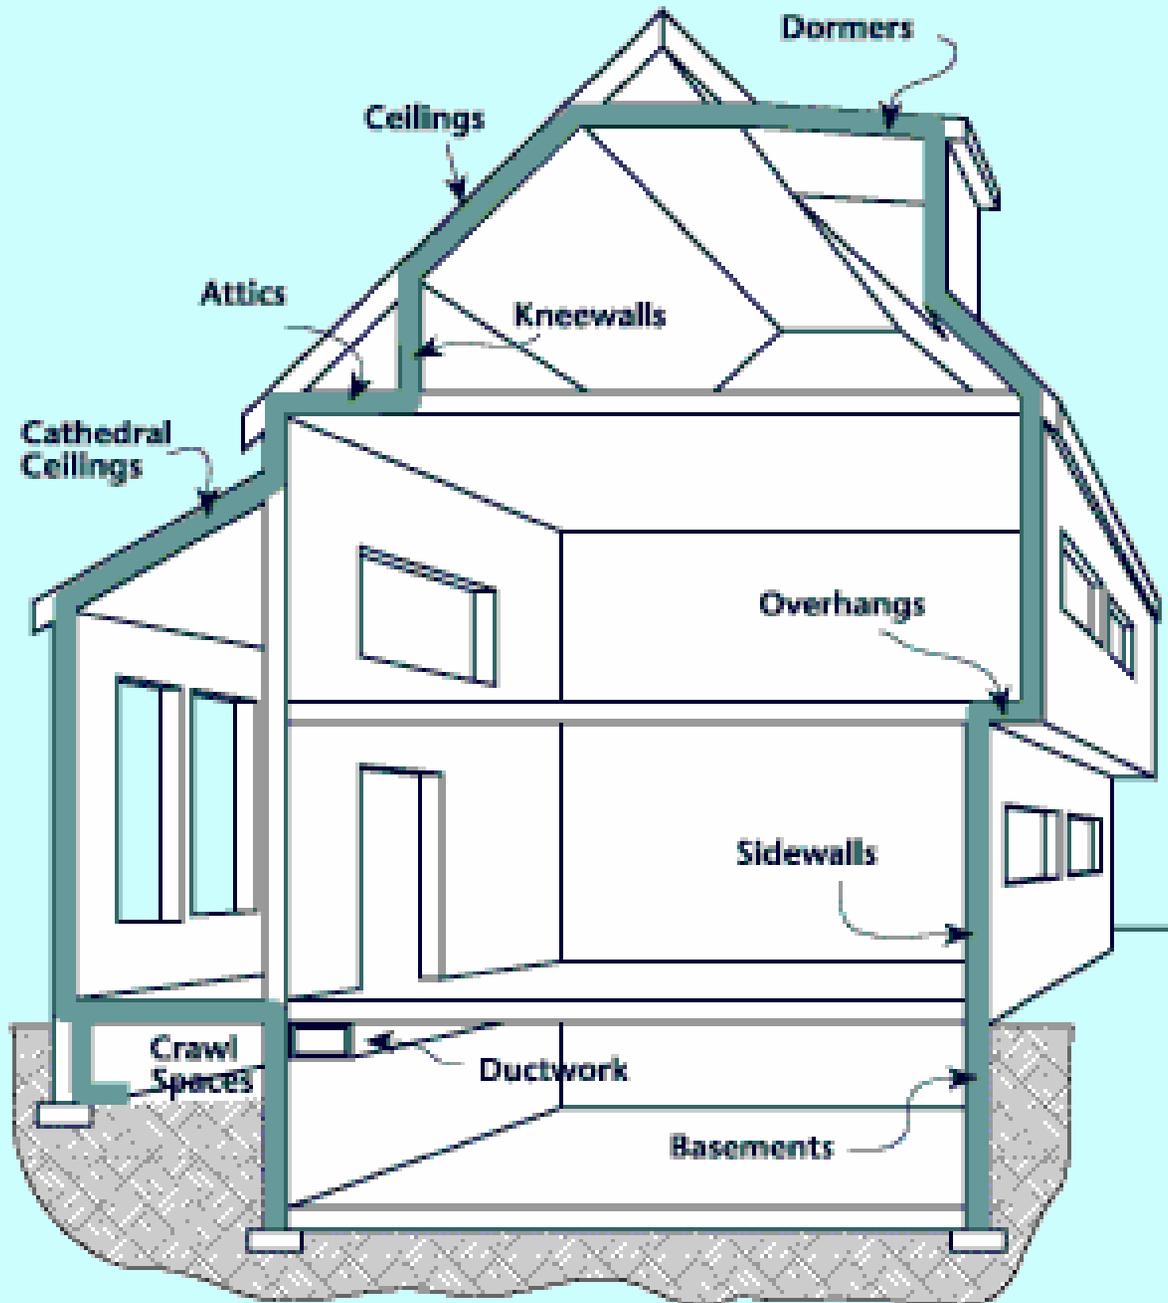

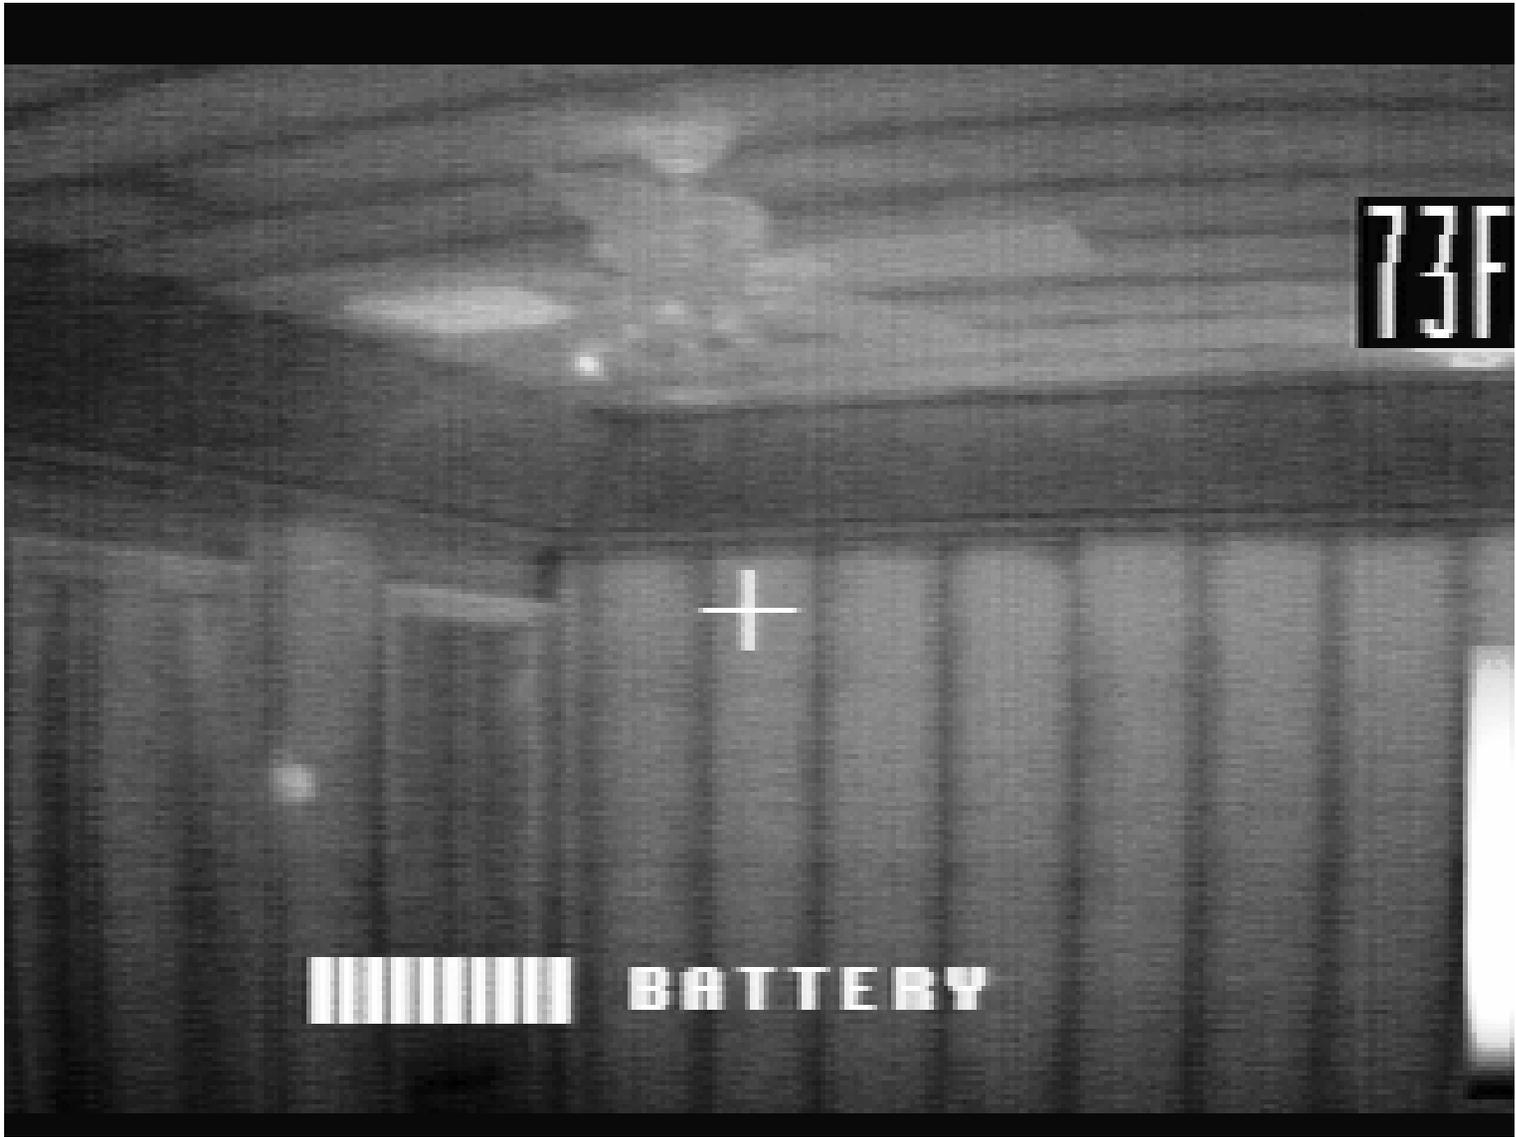



REScheck Software Version 4.0.1 Inspection Checklist

Date: 07/16/07

Ceiling:

- Ceiling 1
Commer

Above-

- Wall 1: V
Commer
- Wall 2: V
Commer
- Wall 3: V
Commer
- Wall 4: V
Commer

Window

- Window
For wind
#Panec
Commer
- Window
For wind
#Panec
Commer
- Window
For wind
#Panec
Commer
- Window
For wind
#Panec
Commer
Note: Up

Doors:

- Door 1: S
Commer
- Door 2: S
Comments: _____

Floors:

- Floor 1: All-Wood Joist/Truss:Over Unconditioned Space, R-30.0 cavity insulation
Comments: _____

Floor insulation is installed in permanent contact with the underside of the subfloor decking.

Heating and Cooling Equipment:

- Furnace 1: Forced Hot Air: 90 AFUE or higher
Make and Model Number: _____

Air Leakage:

- Joints, penetrations, and all other such openings in the building envelope that are sources of air leakage are sealed.

type IC rated
aterials and a 3"

is been determined
rovided.

Above-Grade Walls:

Wall 1: Wood Frame, 16" o.c., R-19.0 cavity insulation

Comments: _____

is been provided.
s or specifications.
ated, and in a

Wall 2: Wood Frame, 16" o.c., R-13.0 cavity insulation

Comments: _____

ings are sealed

other approved

Wall 3: Wood Frame, 16" o.c., R-19.0 cavity insulation

Comments: _____

ith the

the heating and/or

Mechanical Code.

Wall 4: Wood Frame, 16" o.c., R-19.0 cavity insulation


Comments: _____

when the system is

alues; window

U-factors, type and efficiency of space-conditioning and water heating equipment.

NOTES TO FIELD: (Building Department Use Only)

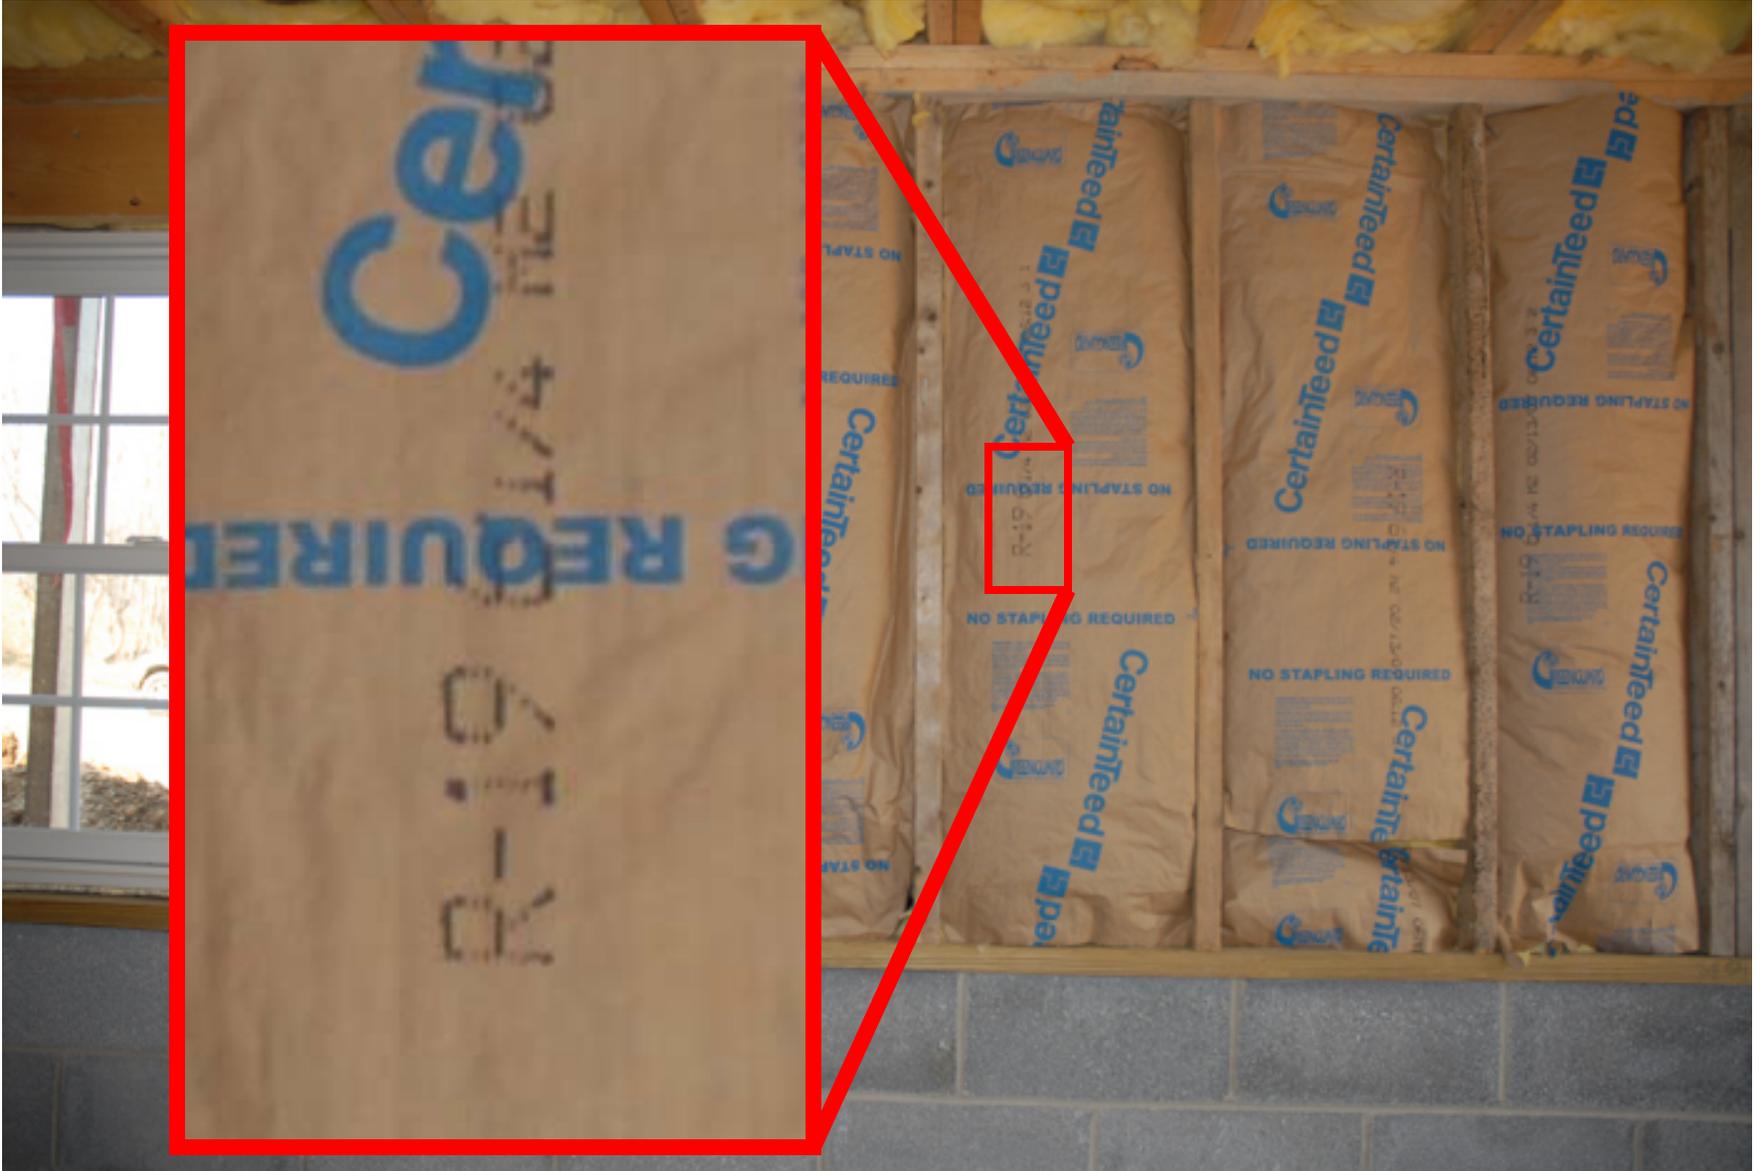



REScheck Software Version 4.0.1 Inspection Checklist

Date: 07/16/07

Ceiling:

Ceiling 1
Commer

Above-

Wall 1: V
Commer

Wall 2: V
Commer

Wall 3: V
Commer

Wall 4: V
Commer

Window

Window
For wind
#Panes .
Commer

Window .
For wind
#Panes .
Commer

Window
For wind
#Panes .
Commer

Window .
For wind
#Panes .
Commer

Doors:

Door 1: S
Commer

Door 2: S
Commer

Floors:

Floor 1: All-Wood Joist/Truss:Over Unconditioned Space, R-30.0 cavity insulation

Comments: _____

Floor insulation is installed in permanent contact with the underside of the subfloor decking.

Heating and Cooling Equipment:

Furnace 1: Forced Hot Air: 90 AFUE or higher

Make and Model Number: _____

Air Leakage:

Joints, penetrations, and all other such openings in the building envelope that are sources of air leakage are sealed.

type IC rated
aterials and a 3"

is been determined
rovided.

is been provided.
s or specifications.
ated, and in a

ings are sealed

other approved

ith the

the heating and/or

Mechanical Code.

when the system is

alues; window

U-factors, type and efficiency of space-conditioning and water heating equipment.

NOTES TO FIELD: (Building Department Use Only)

Above-Grade Walls:

Wall 1: Wood Frame, 16" o.c., R-19.0 cavity insulation

Comments: _____

Wall 2: Wood Frame, 16" o.c., R-13.0 cavity insulation

Comments: _____

Wall 3: Wood Frame, 16" o.c., R-19.0 cavity insulation

Comments: _____

Wall 4: Wood Frame, 16" o.c., R-19.0 cavity insulation

Comments: _____





REScheck Software Version 4.0.1
Inspection Checklist

Date: 07/16/07

Ceiling:

- Ceiling 1
Commer

Above-

- Wall 1: V
Commer
- Wall 2: V
Commer
- Wall 3: V
Commer
- Wall 4: V
Commer

Window

- Window
For wind
#Panes .
Commer
- Window .
For wind
#Panes .
Commer
- Window .
For wind
#Panes .
Commer
- Window .
For wind
#Panes .
Commer
Note: Up

Doors:

- Door 1: S
Commer
- Door 2: S
Comments: _____

Floors:

- Floor 1: All-Wood Joist/Truss:Over Unconditioned Space, R-30.0 cavity insulation
Comments: _____

Floor insulation is installed in permanent contact with the underside of the subfloor decking.

Heating and Cooling Equipment:

- Furnace 1: Forced Hot Air: 90 AFUE or higher
Make and Model Number: _____

Air Leakage:

- Joints, penetrations, and all other such openings in the building envelope that are sources of air leakage are sealed.

type IC rated
aterials and a 3"

is been determined
rovided.

Above-Grade Walls:

Wall 1: Wood Frame, 16" o.c., R-19.0 cavity insulation

Comments: _____

is been provided.
s or specifications.
ated, and in a

Wall 2: Wood Frame, 16" o.c., R-13.0 cavity insulation

Comments: _____

ings are sealed

other approved

Wall 3: Wood Frame, 16" o.c., R-19.0 cavity insulation

Comments: _____

ith the

the heating and/or

Mechanical Code.

Wall 4: Wood Frame, 16" o.c., R-19.0 cavity insulation

Comments: _____

when the system is

alues; window

U-factors, type and efficiency of space-conditioning and water heating equipment.

NOTES TO FIELD: (Building Department Use Only)












Incorrectly Installed Insulation

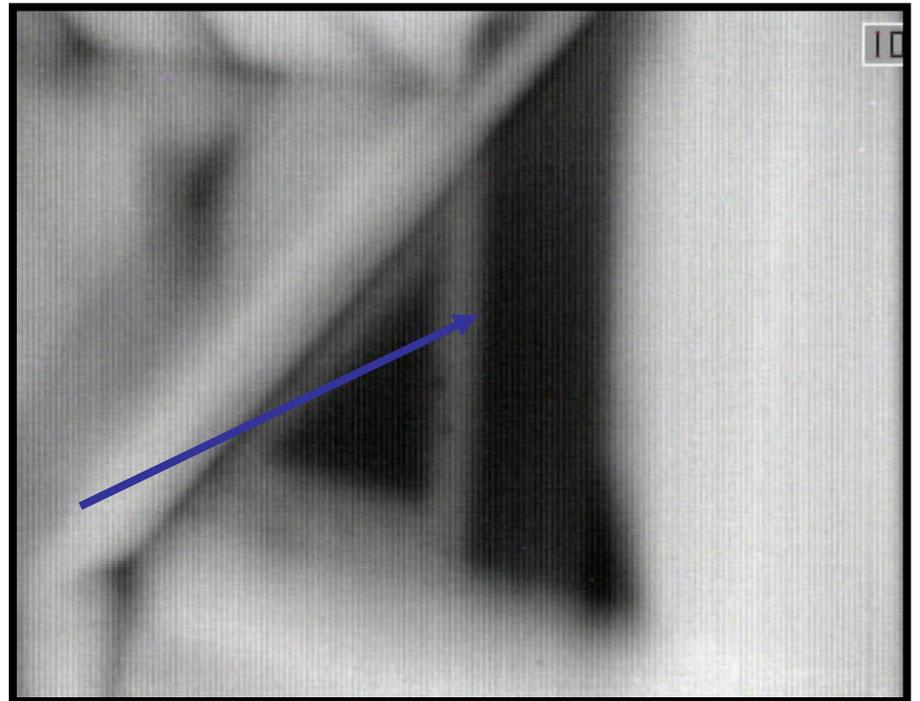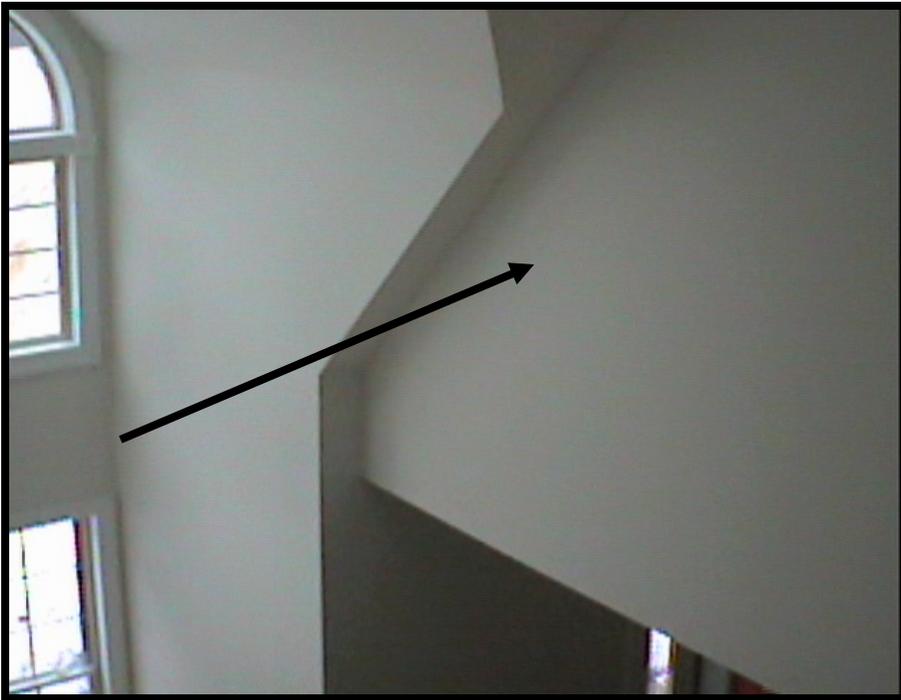

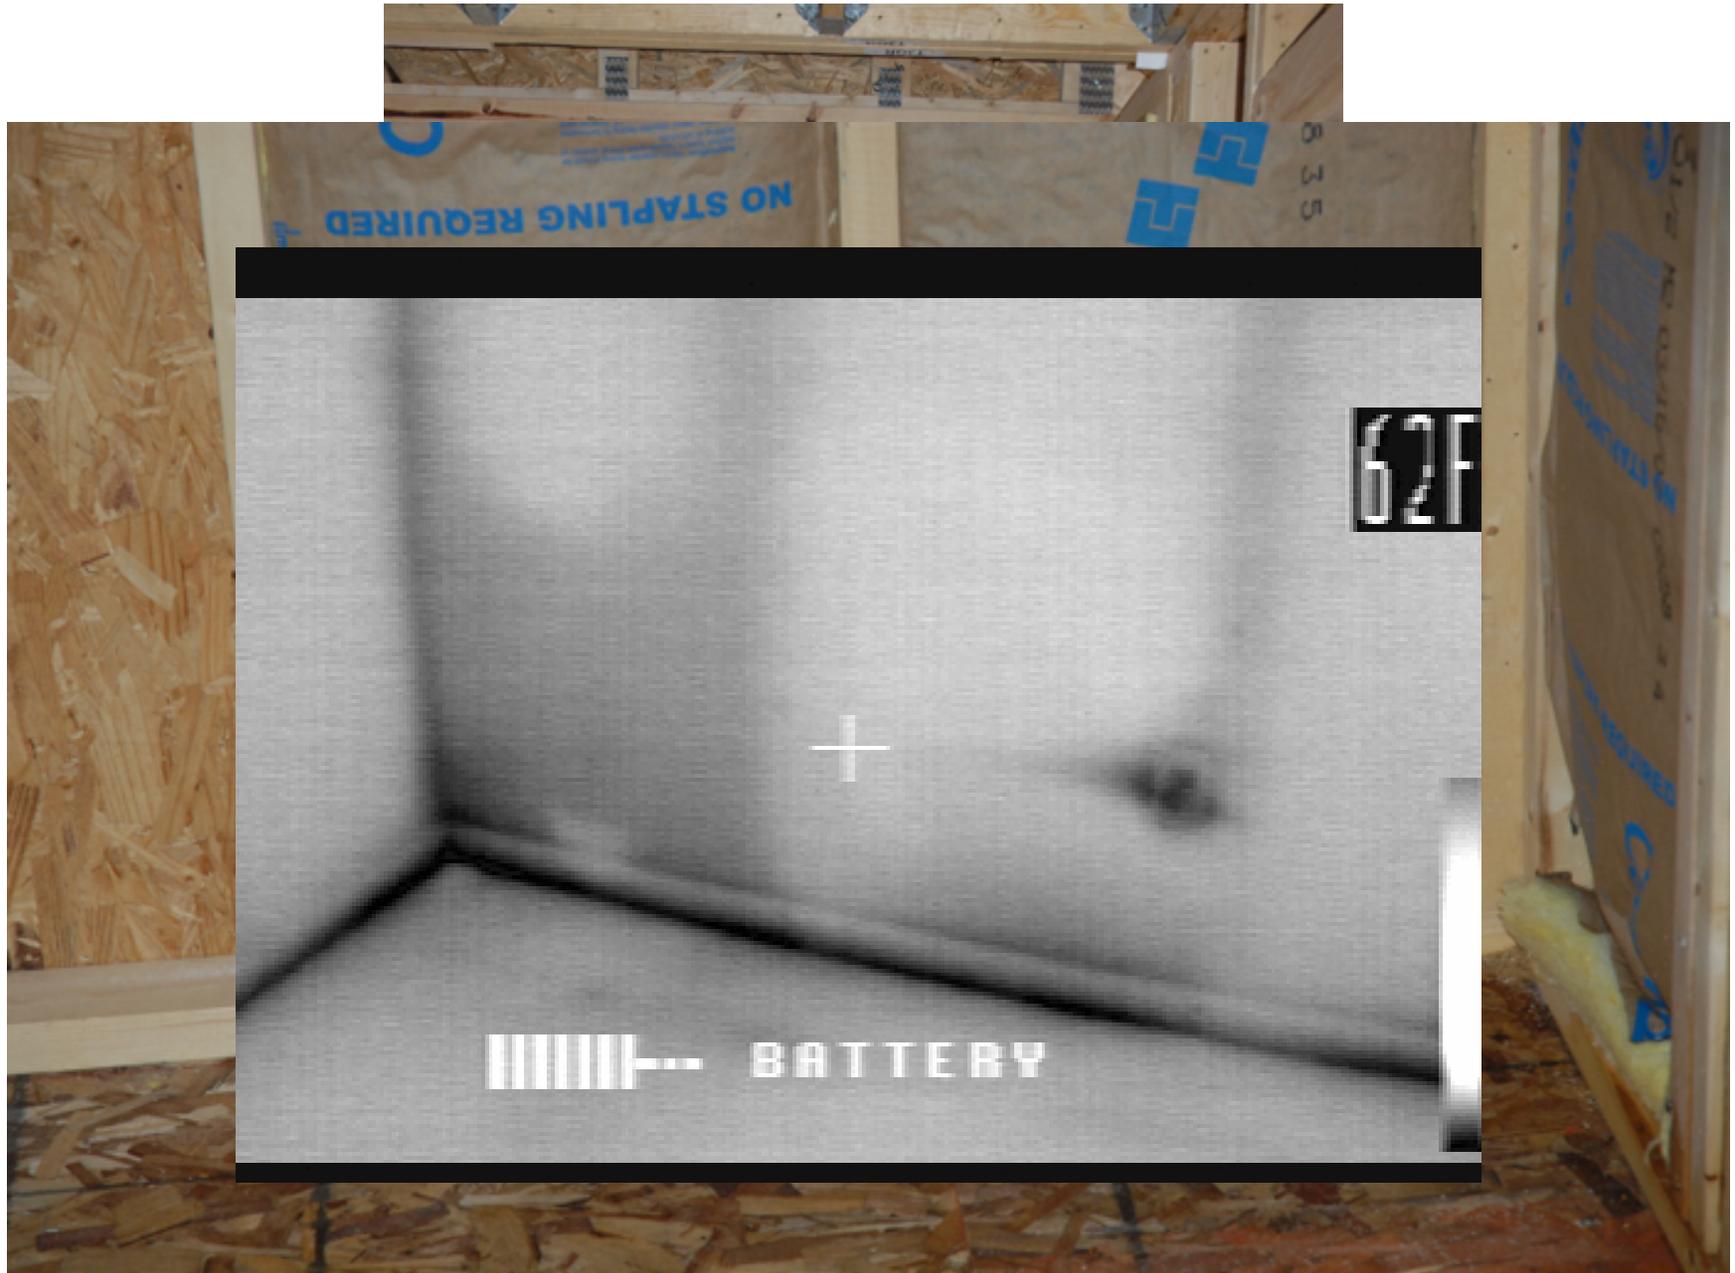






BATTERY

69F

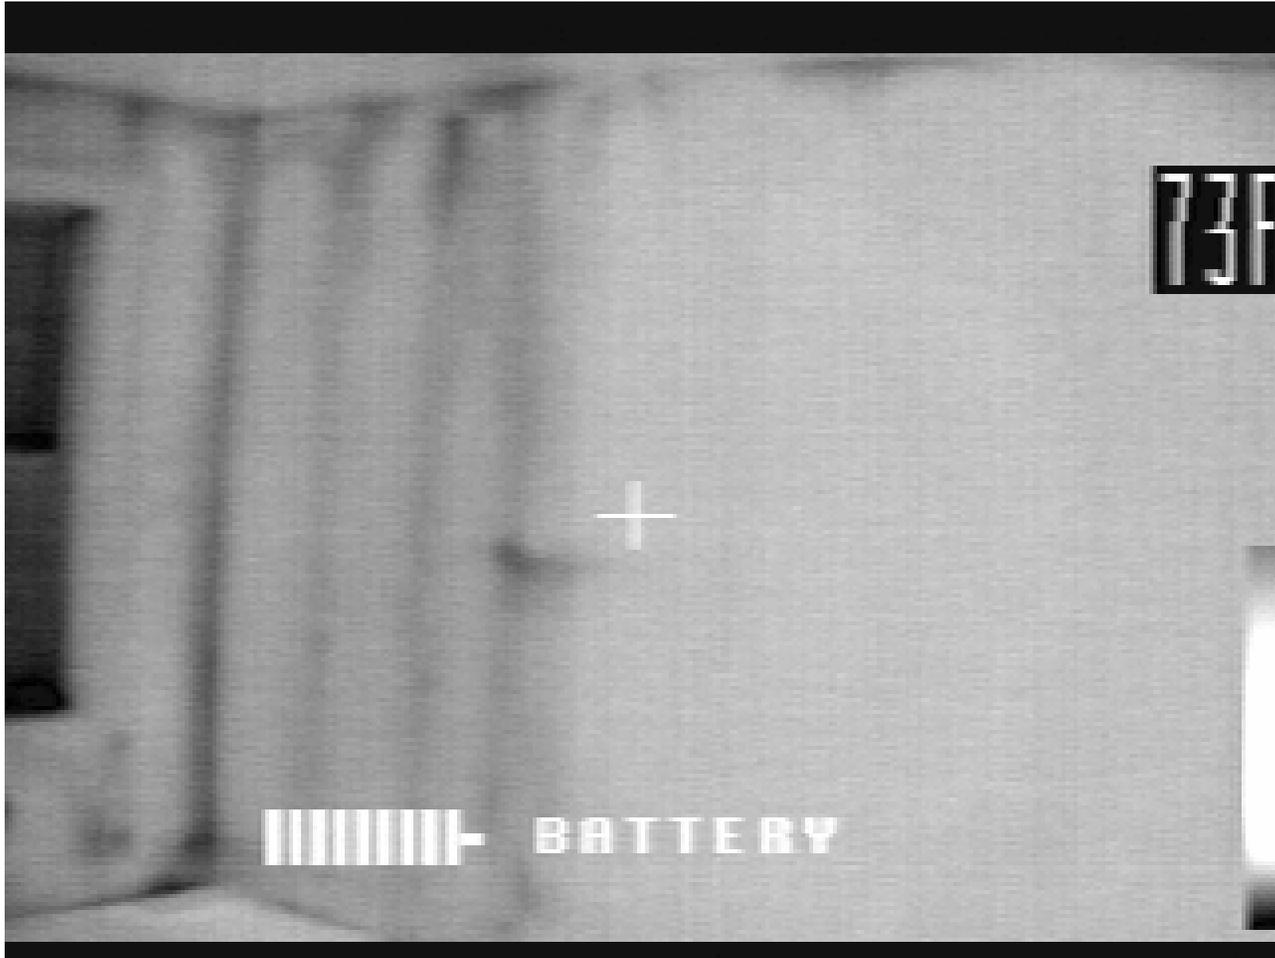







Stairwells



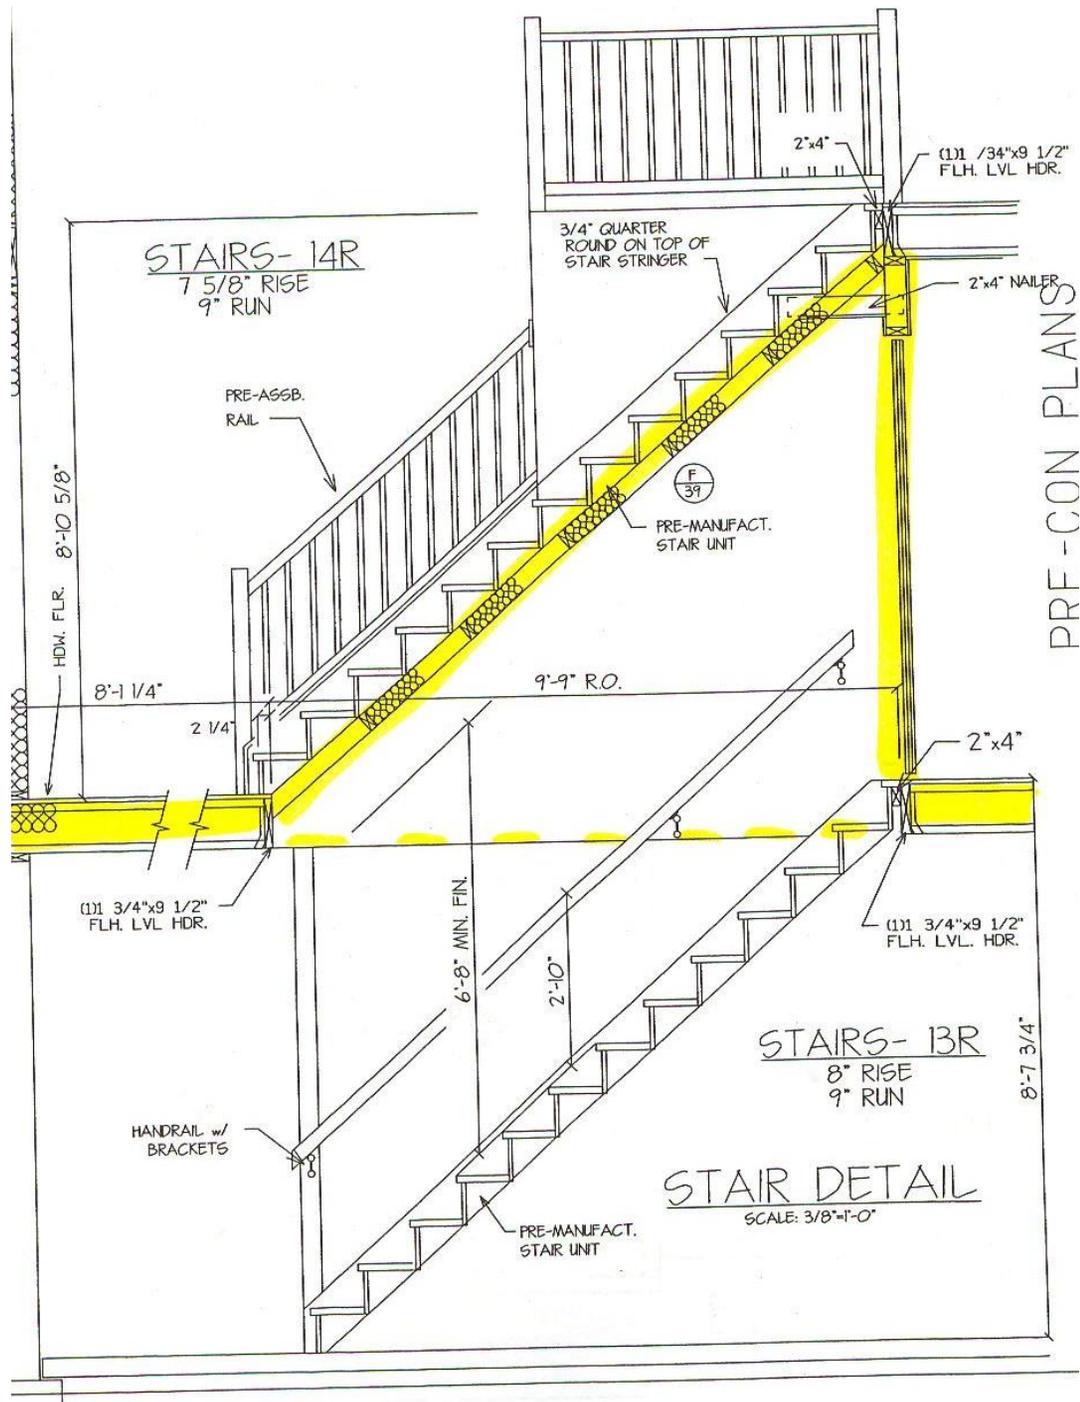



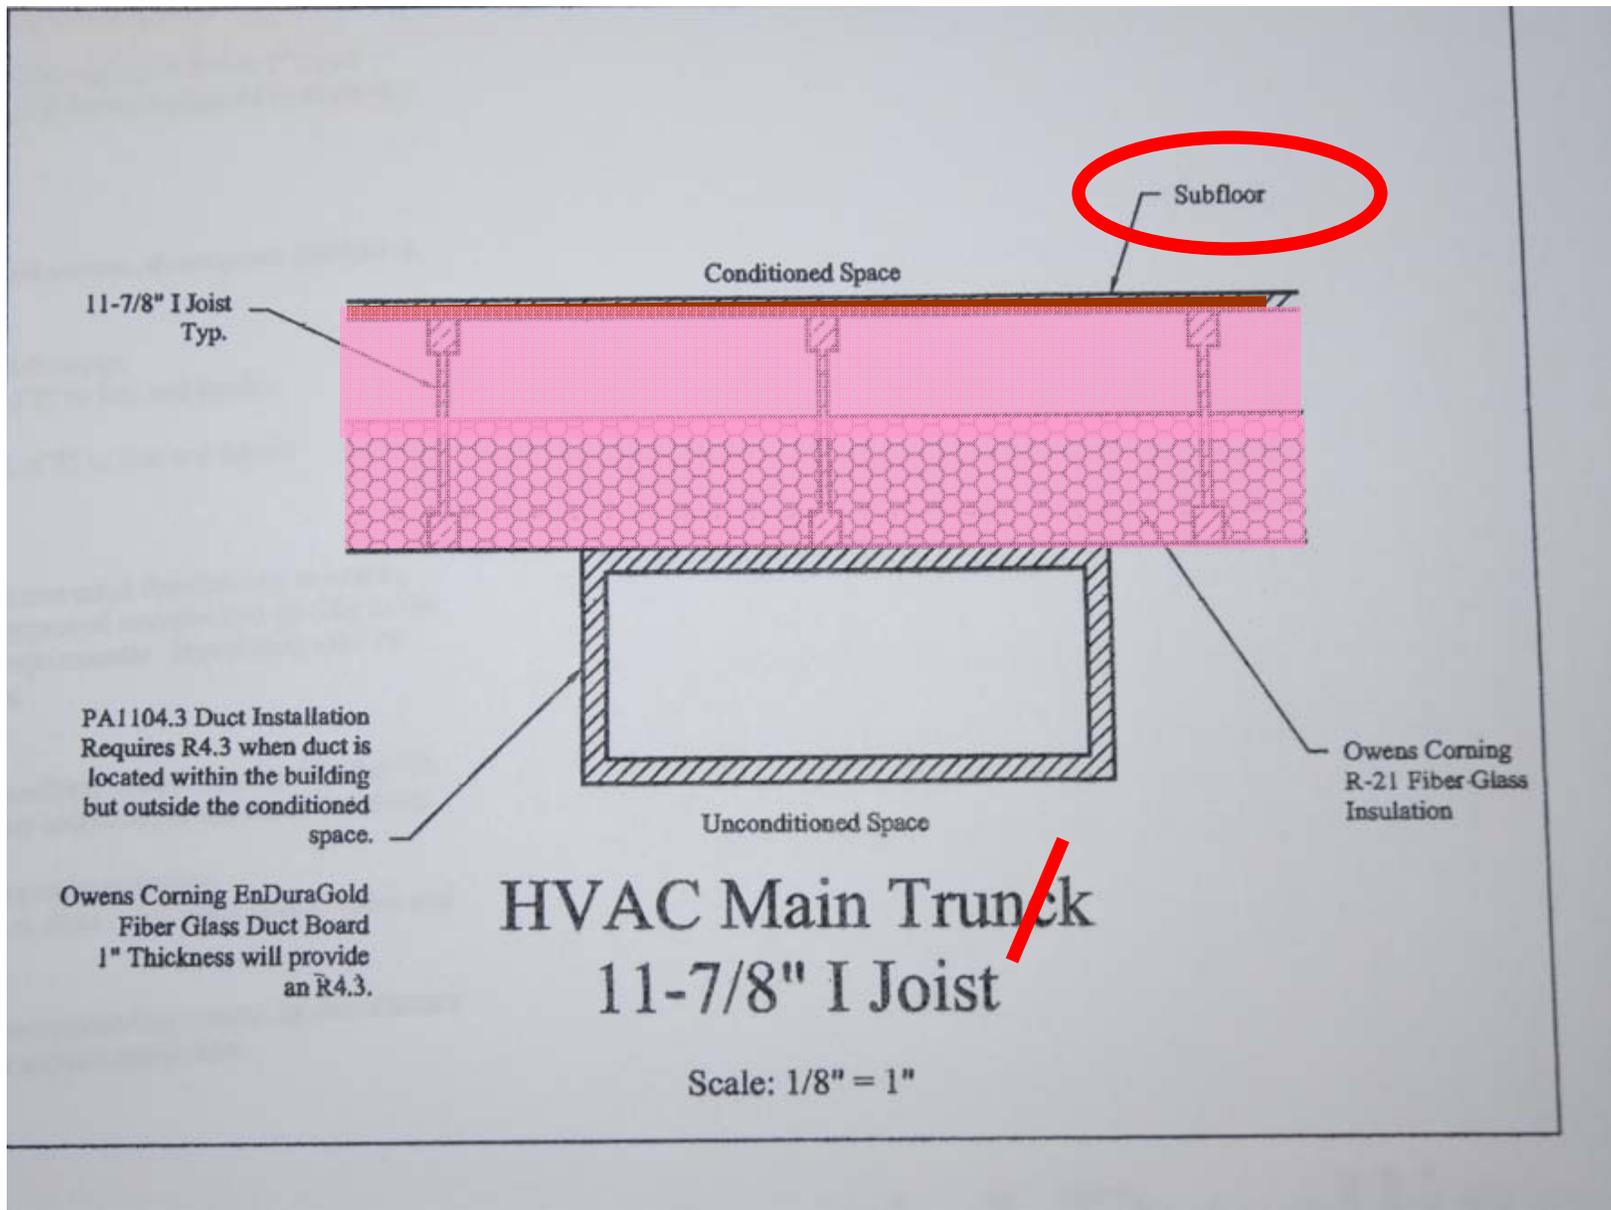











Vapor Retarders





Summary

- Continuity of thermal envelope
- Required R-values
- Installation
 - Compression
 - Gaps
 - Support (especially floors)